

FlexyLIFT MR & MRL Hydraulic Lift



KLEEMANN™
Your 1st Choice in Lifts

FlexyLIFT: Your flexible hydraulic solution!

FlexyLIFT means:


Flexible dimensions, ideal for any building with pit and headroom limitations for rated load from 450kg to 1000kg.

Flexible machine room location: No machine room at all for FlexyLIFT MRL, and a minimum requirement for a small cabinet -it contains the power unit and the controller- and almost no need for pit depth for the FlexyLIFT MR.

Flexible, state of the art, environment friendly, hydraulic solution by KLEEMANN, Your 1st Choice in Lifts.

Features / Advantages

- Minimum requirements for shaft pit dimensions: 350mm for FlexyLIFT MR and 900mm for FlexyLIFT MRL
- Minimum requirements for headroom dimensions: 2600mm
- High quality electronic valve at the power unit (C-LRV)
- Extra devices to ensure installer's safety when operating in the shaft pit or on the top of the cabin.
- Telescopic toeguard with electric sensor
- Exceptional leveling accuracy (max ± 3 mm) and very smooth ride
- Automatic emergency evacuation
- Guaranteed compatibility of all components
- Detailed installation, operation and maintenance manual available
- Can be supplied with «self supporting» steel structure
- Type Examination Certificate according to Directive 95/16 EC
- Optional KIT with environment friendly features (biodegradable oil, low energy LED lights and energy saving controller)
- Technical support and guarantee by KLEEMANN

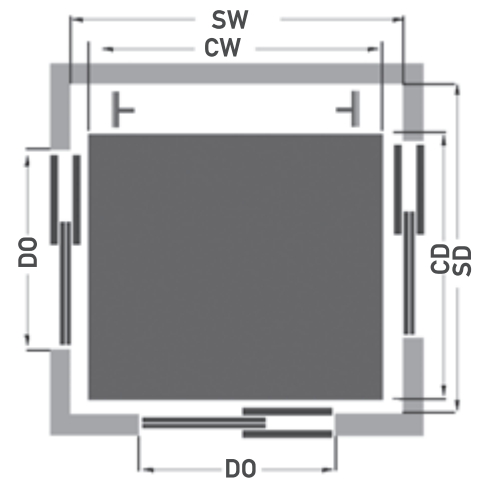

	FlexyLIFT MR (power unit and controller inside a small cabinet)						FlexyLIFT MRL (machine room less)													
	Fully automatic, 2-panel side opening																			
Landing/Car doors	I	II	III	I	II	III	I	II	III	I	II	III	I	II	III	I	II	III		
SW: Shaft Width [mm]	1450			1550	1725	1600	1765	1450			1550	1725	1600	1775						
SD: Shaft Depth [mm]	1625			1775	1950	2475	2650	1625			1775	1950	2475	2650						
DO: Door opening [mm]	800			800 or 900			800			800 or 900										
CW x CD: Car width x Car depth [mm]	1000 x 1250			1100 x 1400			1100 x 2100 *			1000 x 1250			1100 x 1400			1100 x 2100 *				
Max operating speed [m/sec]	1.0																			
Max travel height [m]	25			22			30			25			22			30				
Max number of landings	11																			
Min Pit depth [mm]	350			350			400			900			900			1000				
Min Headroom [mm]	2600 **																			

* Also available for 1400 x 1600mm car dimensions (SW: 1 or 2 doors 1900mm, 3 doors 2065mm, SD: 1 door 2000mm, 2 or 3 doors 2150mm)

** For 2000mm clear door height

KL3 FLEXYLIFT ENG 02/11



KLEEMANN™
Your 1st Choice in Lifts

Head Offices - Export Sales: Kilkis Industrial Area, PO Box 25, Kilkis, Greece
Tel.: +30 23410 38 100, Fax: +30 23410 38 200, E-mail: headoffice@kleemann.gr

www.kleemannlifts.com

